

MetalTag™ Slim-F


Thin & Small Metal-Mount UHF RFID Tag

MetalTag™

At a volume of about 1.5 cm³ (0.1 in³), MetalTag™ Slim-F is the smallest metal mount tag on the market that consistently reads from 3m. Perfect for IT and other asset tracking applications that require a smaller footprint than MetalTag™ Slim.

Material Characteristics

- EPC Gen 2 metal-mount RFID tag
- Small form factor (1.4" x 0.625")
- Thin (0.12") robust construction
- Available with integral pressure sensitive adhesive
- Ground plane standard

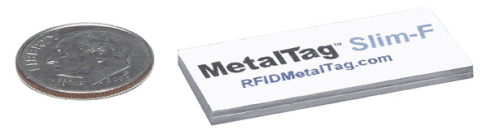

MetalTag™ Slim-F's outstanding read-range and flexible form make it ideal for asset tracking & supply chain applications where footprint must be minimized.

Bar Code - Human Readable

- Available with EPC encoding, barcode, and human readable content
- Available with paper or polyester labels
- Available with custom label printing (4-color)

Typical Properties

Frequency	UHF
Protocol	EPC Gen 2
Service Temperature	-40F - 185F (-40C - 85C)
Weight	2 grams
Size	1.4" x 0.625" x 0.12" (36mm x 16mm x 3mm)
Read Range	8' - 15' (2.5m - 5m)